


Raychem E-100-E AND E-100-L-E

END SEAL AND LIGHTED END SEAL

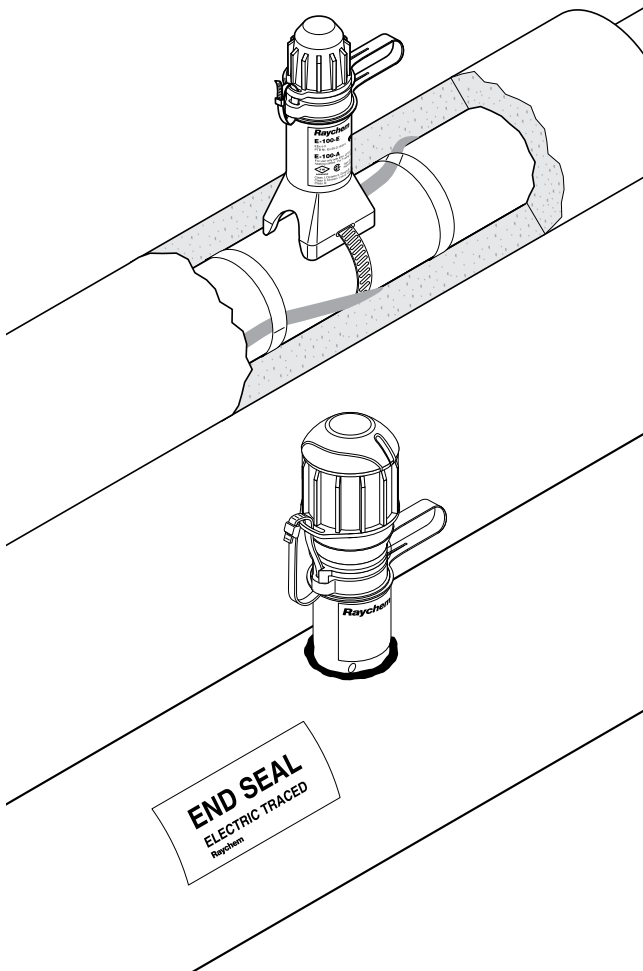

Both the E-100-E and E-100-L-E are accessible, re-entrable end seals, the E-100-E without a light, the E-100-L-E with a signal light. Both end seals can be used with all Raychem BTV, QTVR, XTV, KTV or VPL industrial parallel heating cables. They are approved for use in hazardous areas. They are extremely rugged - made of a strong, moulded part with 4 mm wall thickness.

The heating cable is firmly kept in place by the integral strain relief.

Sealing is done twice. First a dry compartment for the heating cable is created, then a boot filled with a non-curing sealant (silicone free) is placed over the end of the heating cable inside the compartment.

The end seals are mounted on the pipe and project through the cladding.

The light module of the E-100-L-E uses an array of super-bright green LEDs for long life and excellent visibility from almost any angle. The robust industrial-grade electronics are encapsulated to reliably seal out moisture.

Extra sealant filled boots for the E-100-E end seal can be ordered separately.

KIT CONTENTS

E-100-E

- 1 end seal
- 1 cable tie
- 1 polywater sachet
- 1 installation instruction

E-100-L-E

- 1 end seal with indicator light
- 1 cable tie
- 1 polywater sachet
- 2 insulated parallel crimps
- 1 core sealer
- 1 installation instruction






APPROVAL DATA

Area of use: Hazardous or ordinary (indoors and outdoors)

APPROVALS



E-100-E

E-100-L-E

PTB 09 ATEX 1060 U  II 2G Ex e II II 2D Ex tD A21 IP66 IECEx PTB 09.0038U Ex e II Ex tD A21 IP66  Ex e II T*	Sira 14ATEX3015X  II 2GD Ex e mb IIC T* Gb Ex tb IIIC T***°C Db Ta = -40°C to +40°C IECEx SIR 14.0007X Ex e mb IIC T* Gb Ex tb IIIC T***°C Db Ta = -40°C to +40°C  CLI, ZN1, AEx e mb IIC T* Gb (1) ZN21 AEx tb IIIC T*  Ex e mb IIC T* Gb Ex tb IIIC T***°C Db
--	---

DNV Certificate No. DNV-GL TAE00000TV and DNV-GL TAE00000TU
 *For T-rating, see heating cable or design documentation

(1) Except VPL

	TC RU C-BE.MI062.B.02853 1Ex e IIC Ex tD A21 IP66		TC RU C-BE.MI062.B.02853 1Ex e mb IIC Ex tD mbD A21 IP66
---	---	--	--

PRODUCT SPECIFICATIONS

E-100-E

E-100-L-E

Max. pipe temperature	Refer to heating cable specification (absolute maximum is 260°C)	
Max. operating voltage	480 V*	277 V
	*Extra conditions for safe use apply for voltages above 277 V. Please refer to the certificate or installation instructions for full details.	
Ambient temperature range	-50°C to +56°C*	-40°C to +40°C
	*Extra conditions for safe use apply for ambient temperatures above +40°C. Please refer to the summary the certificate or installation instructions for full details.	
Min. installation temperature	-50°C	-40°C
Overall height	171 mm	197 mm
Outer diameter	46 mm	66 mm
	Usable with up to 100 mm thermal insulation	
Ingress protection	IP66, Type 4X	IP66, Type 4X
Impact resistance	EN 60079-30-1, ≥ 7 joules	EN 60079-30-1, ≥ 7 joules
UV stability	No degradation after > 1000 h	No degradation after > 1000 h
Solvent resistance	Excellent	Excellent
Strain relief	> 250 N	> 250 N

LIGHT SOURCE

Type	Green LEDs
Voltage rating range	110-277 Vac, 50/60 Hz
Power consumption	< 2 W
Electromagnetic immunity/emissions	Complies with IEC61000-6 and IEC61000-4

INSTALLATION DATA

Tools required	Cable knife, wire cutters, screwdriver	Cable knife, wire cutters, screwdriver, crimp tool (Panduit-CT-100), long nose pliers
----------------	--	---

ORDERING DETAILS**End seal**


Part description	E-100-E	E-100-L-E
PN (Weight)	101255-000 (0.22 kg)	P000001583 (0.63 kg)
	Requires one pipe strap (not supplied)	Requires one pipe strap (not supplied)
		PTB, DNV and EAC approved product

ACCESSORIES

Small pipe adaptor	JBS- SPA, required for pipes \leq 1" (DN 25), E 90515-000 (bag of 5 adaptors)
--------------------	---

SPARE PART

Boot pack for E-100-E



Part description	E-100-BOOT-5-PACK
PN (Weight)	281053-000 (140 g)
Pack size	5 sealant filled boots and 5 cable ties

Replacement indicator light for E-100-L	
Part description:	E-100-LR-E
PN	P000001586



WWW.PENTAIRTHERMAL.COM

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

UNITED KINGDOM

Tel: 0800 969 013
Fax: 0800 968 6241
salesthermaluk@pentair.com

IRELAND

Tel: 1800 654 241
Fax: 1800 654 240
salesie@pentair.com

Pentair is owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 1998-2016 Pentair.